
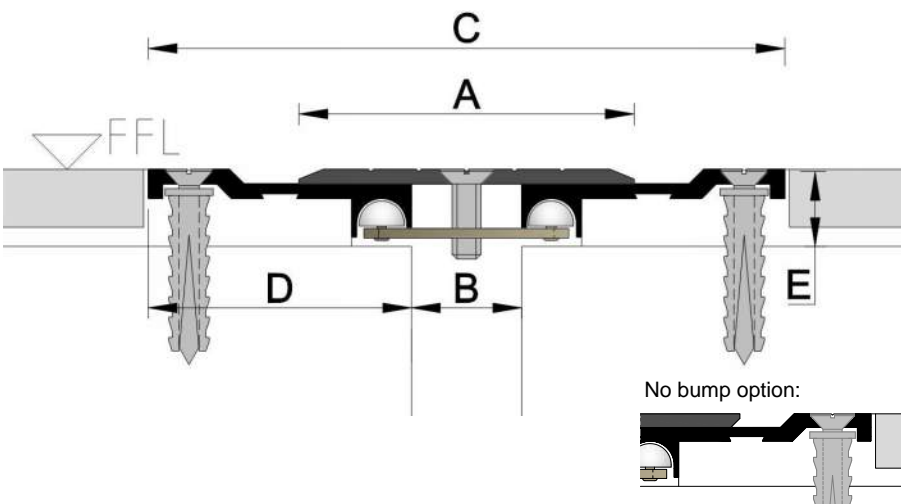


Flexo D Coverplate EJs

Flexo D: Low profile, floor coverplate system designed for retrofit, or where substrate rebating has minimal requirement. A widely used, versatile system, suitable for refurbishments and new-to-old slab jointing. The FxD can also be specified in works where substrate rebate specification is an unknown factor. FxD can be supplied with coverplates finished in stainless steel, natural and colour anodised aluminium, or bead-blasted. Is used in retail buildings, supermarkets and department stores, mixed-use developments, public and other buildings.

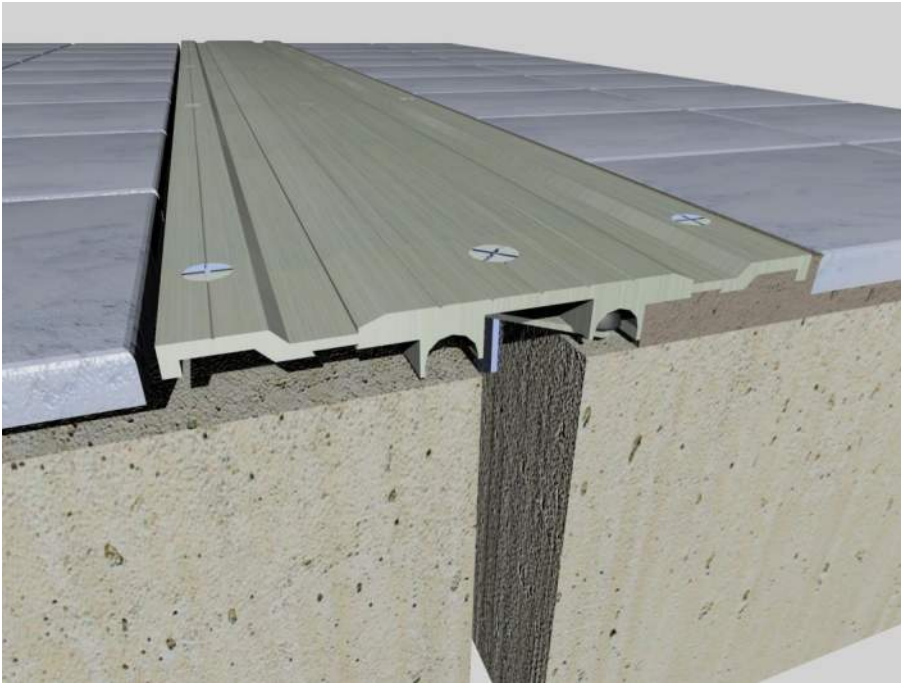

Product	A: Coverplate		B: Gap				C: Exposed Width		
	Width	Thick	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.
Fx70D	70	3	6	33	59	53	116	143	169
Fx100D	100	4	30	57	83	53	141	168	194
Fx80DNB	80	4	6	33	59	53	116	143	169
Fx110DNB	110	4	38	68	97	59	148	178	207

Fx DS Stainless Steel Model Available

Block Out: 55D x 21E

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.6



Fx D

Previous Model No: UAD



Multi-directional



Performance

- Concealed Fixings
- Low profile / Retrofit
- High Capacity
- Low Maintenance

Bead blasted cover plate
Slip resistance Class V
Tested to AS4586 2013

Compatible Finishes

- Tiles
- Vinyl
- Carpet
- Epoxy
- Concrete

Standard Length

4.8m

Standard Finish

Anodised Aluminium

Options

Clear Anodised CI	Stainless Steel SS
Bead Blasted BB	No Bump NB
Fire Rating 	Water Proof