
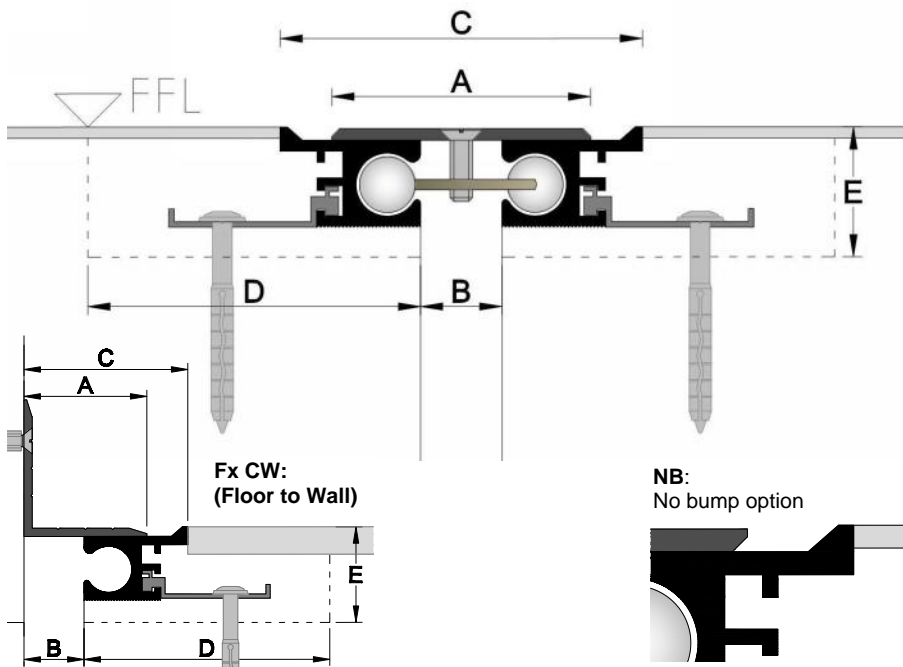


# Flexo C Coverplate EJs

**Flexo C:** The most widely used floor coverplate expansion joint system. FxC is used in retail centres, supermarket and department-store trading floors, airports terminals, apartment developments, public buildings etc. Offering multi-directional movement, and composite c-bars, it is compatible with most floor finishes. Coverplate available in Stainless Steel, Bead-blasted Aluminium, Natural or Colour Anodised Aluminium.

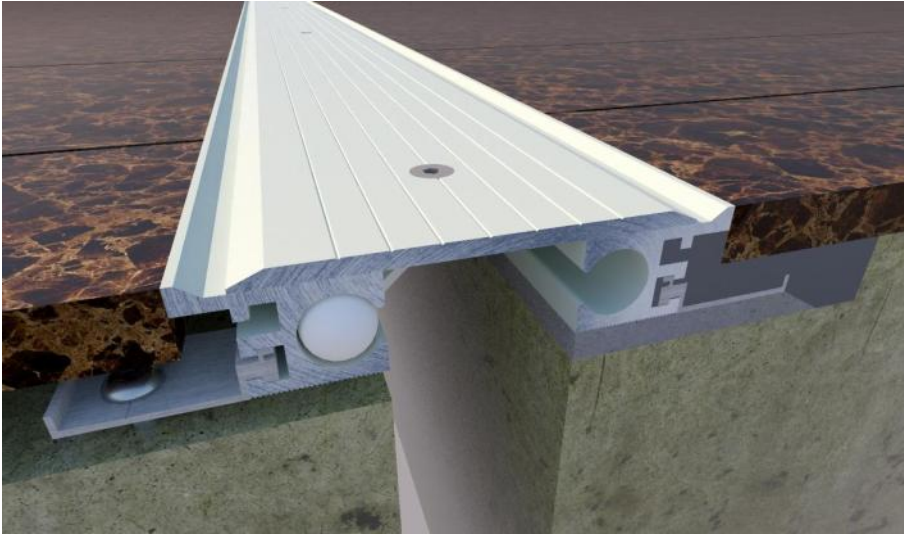

## Fx C

Previous Model No: UAC



Multi-directional



## Performance

Concealed Fixings

Thermally Dynamic

High Capacity

Low Maintenance

**Bead blasted cover plate**

**Slip resistance Class V**

**Tested to AS4586 2013**

## Compatible Finishes

Tiles  
Vinyl  
Carpet  
Epoxy

## Standard Length

4.8m

## Standard Finish

Anodised Aluminium

## Options



Bead Blasted



Fire Rating



No Bump



Water Proof



Product	A: Coverplate		B: Gap				C: Exposed Width		
	Width	Thickness	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.
Fx50C	50	3	6	26	46	40	63	83	103
Fx70C	70	3	6	36	66	60	82	112	142
Fx100C	100	4	36	66	96	60	112	142	172
Fx120C	120	4	56	86	116	60	132	162	192
Fx45CW	50	3	13	28	43	30	51	66	81
Fx75CW	75	3	43	58	73	30	81	96	111
Fx75CNB	75	4	7	37	67	60	83	113	143
Fx110CNB	110	4	42	72	102	60	118	148	178

## Block Out: 90D x 35E

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.7