
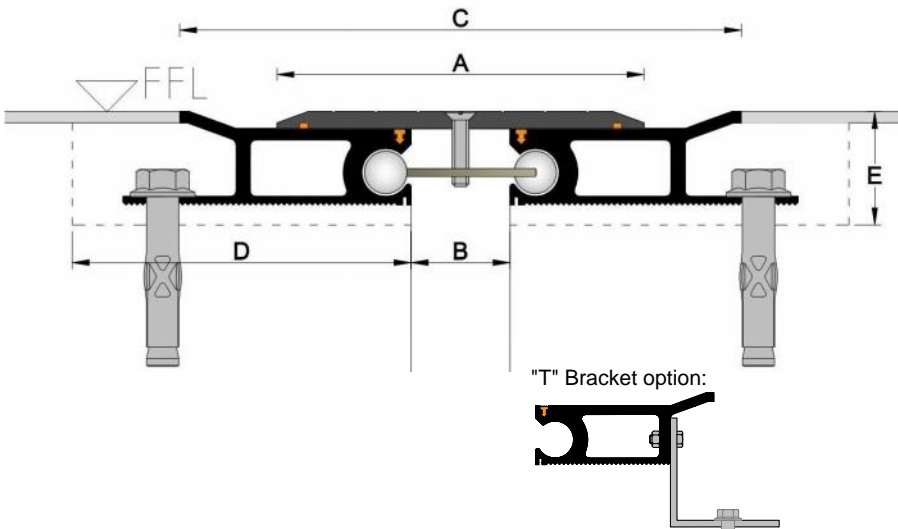


# Flexo CH Coverplate EJs

**Flexo CH:** A heavy duty architectural floor coverplate system designed for use with heavy pedestrian, and infrequent service-equipment traffic. Suitable for use in concourse areas such as stadiums, convention centres, airport terminals. FxCH can be supplied with coverplates finished in natural and colour anodised aluminium, or bead-blasted. There is also an optional "T" bracket modification, for use in exposed agg, terrazzo, stone or paving.

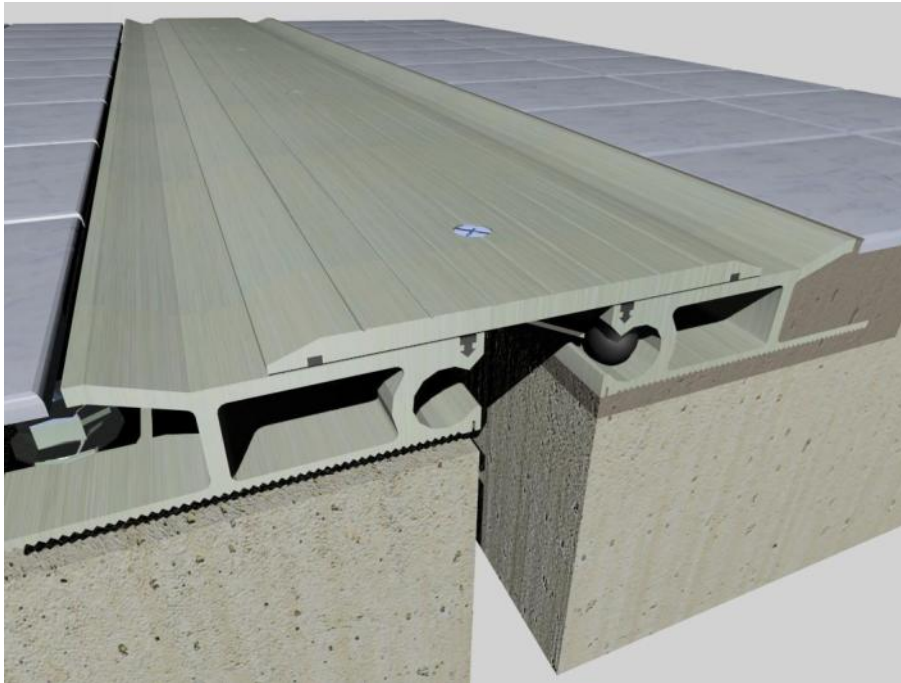

## Fx CH

Previous Model No: UAC HD



### Performance

- Heavy duty
- Concealed Fixings
- High Capacity
- Low Maintenance

**Bead blasted cover plate**  
**Slip resistance Class V**  
**Tested to AS4586 2013**

### Compatible Finishes

- Tiles
- Vinyl
- Epoxy

### Standard Length

4.8m

### Standard Finish

Anodised Aluminium

### Options



Bead Blasted



Fire Rating



Water Proof



Product	A: Coverplate		B: Gap				C: Exposed Width			Vertical Movement
	Width	Thick	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.	
Fx130CH	130	6	6	60	114	108	170	224	278	±15
Fx165CH	165	5	41	95	149	108	205	259	313	±15
Fx220CH	220	6	96	150	204	108	260	314	368	±15

**Block Out: 120D x 40E**

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.4