
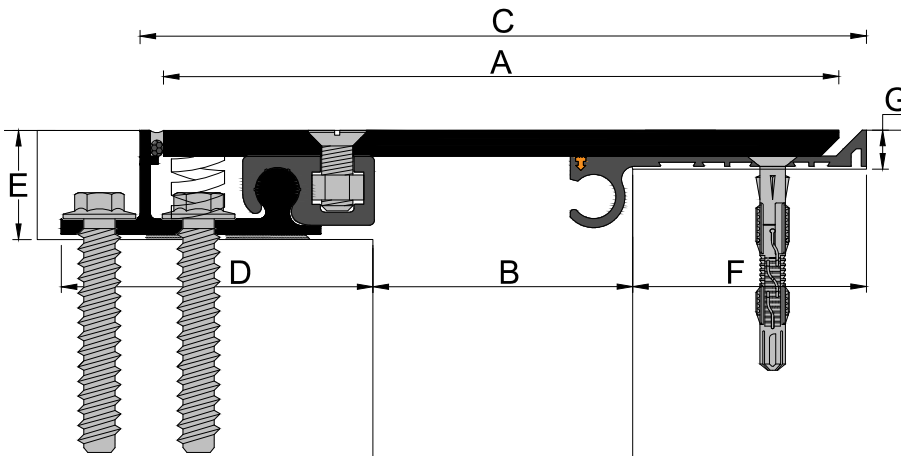


# SeiMax By Coverplate EJs

**SeiMax By:** Seismic Brawny (SiBy) is a carpark coverplate system with high movement capacity in all directions. SiBy is designed for small and large seismic movement gaps. It can house 6mm to 10mm thick coverplates, flush-mounted. SiBy is designed so during normal seasonal-thermal movement the coverplate actuates flush with surrounding aluminium housings to ensure shopping trolleys, pedestrians and passenger vehicles have a smooth transition across movement gaps. It also has capacity for second phase of movement during seismic event. The sliding plate housings are mounted with edges flush with carpark wearing surface... retaining the wearing surface, and therefore protecting the edges. A heavy-duty system for use in carparks for shopping centres, convention centres, airports and other heavy duty, slow-traffic, seismic applications.

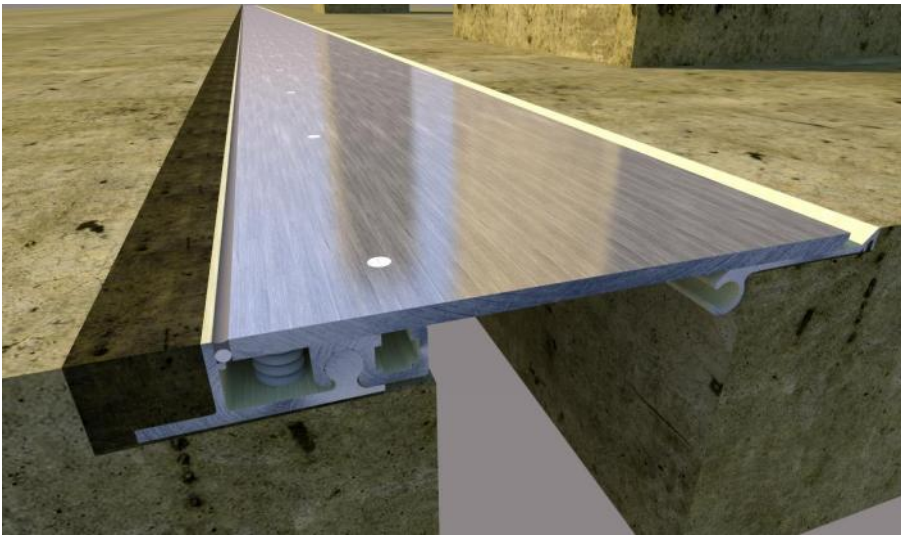

Product	A: Coverplate		B: Gap				C: Exposed Width			Seismic Movement
	Width	Thickness	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.	
Si240By	240	6	70	115	160	90	255	300	345	170
Si300By	300	10	130	175	220	90	315	360	405	230
Si400By	400	10	230	275	320	90	415	460	505	330
Si600By	600	10	430	475	520	90	615	660	705	530

**Block Out: 140D x 42E x 90F x 18G**



## Si By



### Performance

Thermal & seismic movement  
Extra Heavy Duty  
High Capacity

### Compatible Finishes

Bitumen  
Paving  
Concrete  
Epoxy-coat

### Standard Length

4.8m

### Standard Finish

Linished Finish Coverplate

### Options

Bead Blasted



Fire Rating



Water Proof




Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.4

# SeiMax By Coverplate EJs



## Si By Seismic Movement Demonstration:

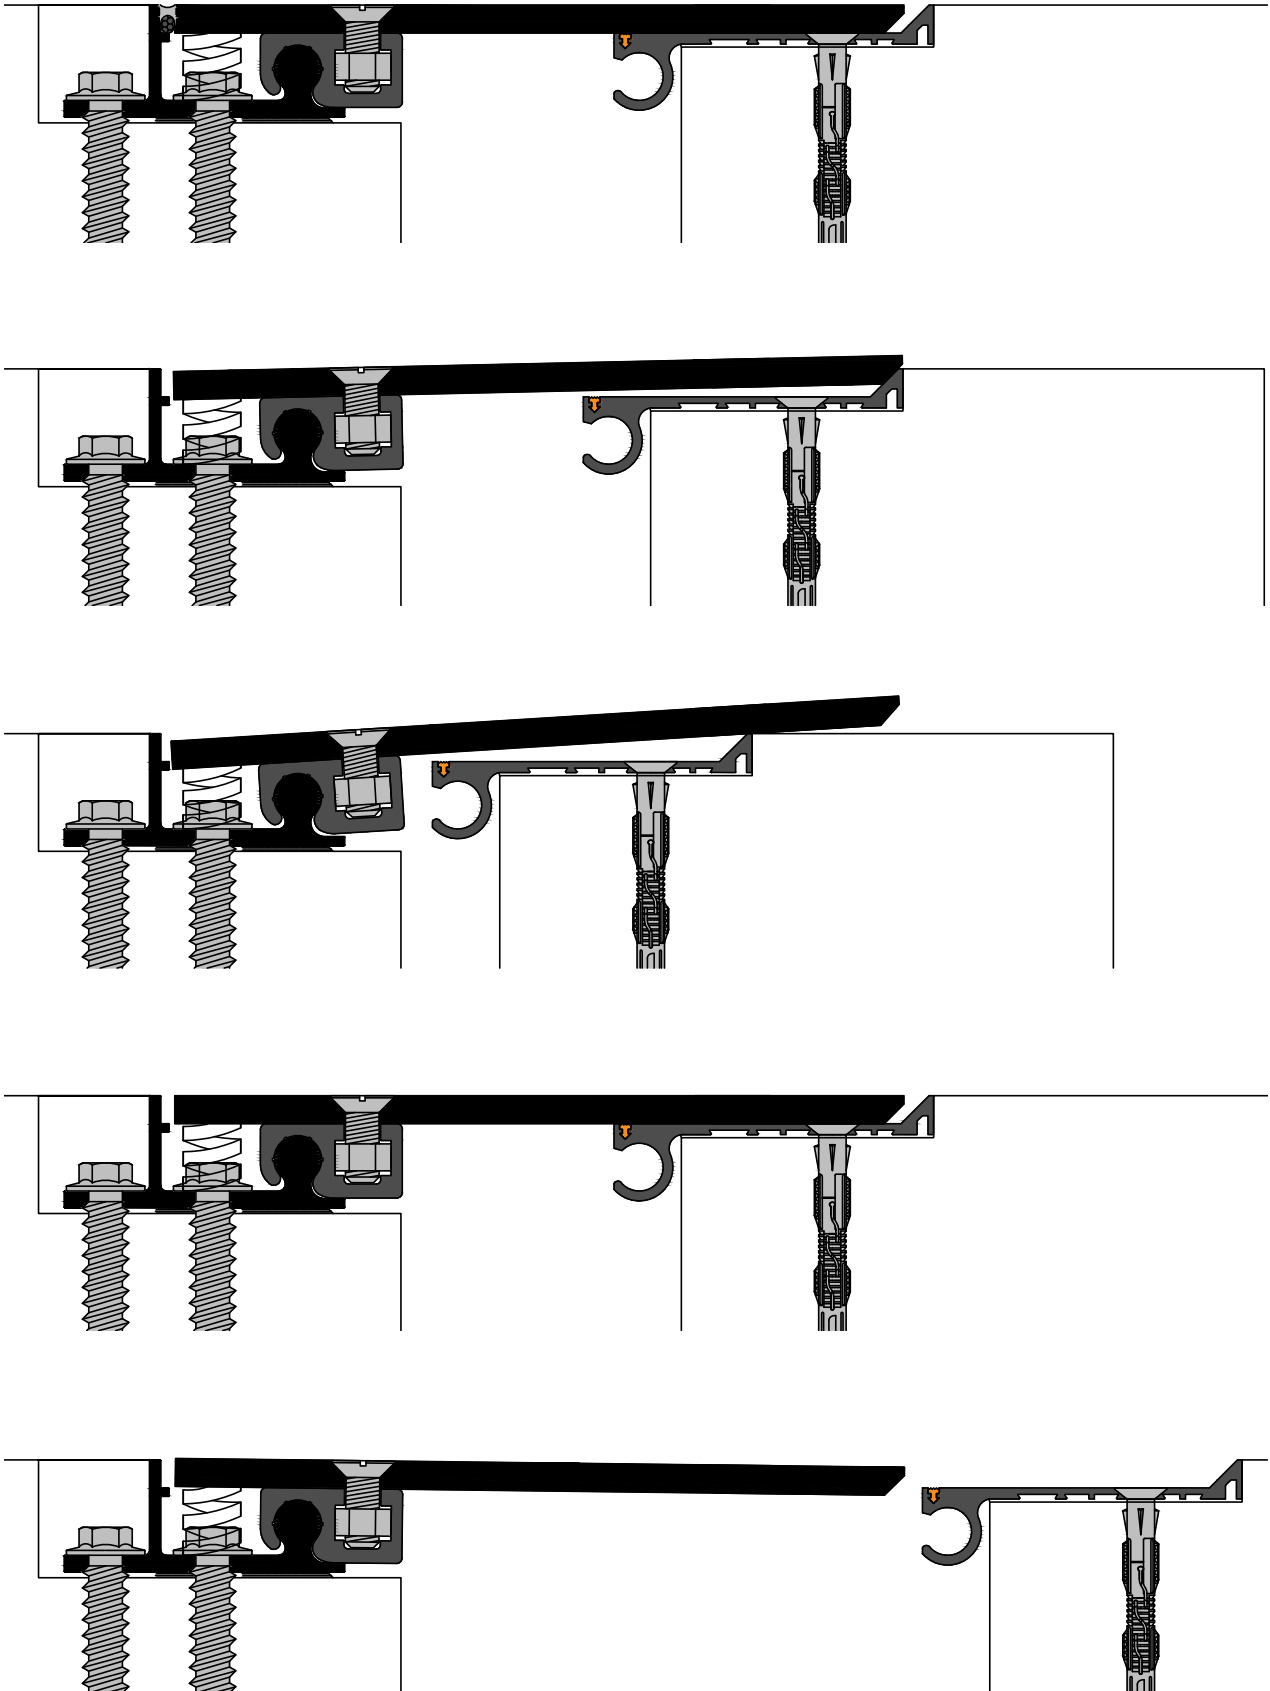

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.1