
Designer's Choice D type Coverplate EJs

Designer D: Revolutionary design combines slim visual width, low profile (edge thickness 7mm), and hidden fixings. This floor coverplate system is designed for use in polished concrete, roll-coat epoxy, tiles, vinyl and other floor finishes. Low profile and slender width allows for minimal substrate rebating. Leaves no visual grout line when applied to polish or trowel-finished concrete. Suitable for high-end retail/commercial fit-outs with rebating constraints. Stadiums, transit-centres and other buildings with suspended-slab or slab-on-ground concrete.





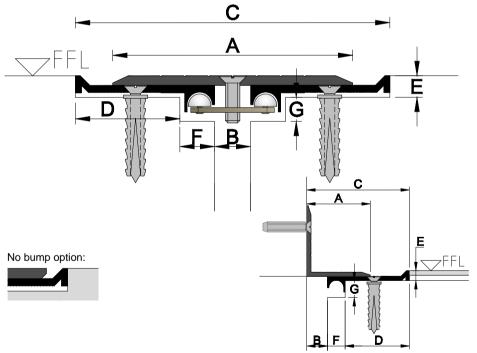

Dz D

Previous Model No: UADJ











Performance

Concealed Fixings

Low profile / Retrofit

High Capacity

Low Maintenance

Bead blasted cover plate Slip resistance Class V Tested to AS4586 2013

Compatible Finishes

Tiles
Vinyl
Carpet
Epoxy
Exposed Concrete

Standard Length

4.8m

Standard Finish

Anodised

Options

Člear Anodised Stainless Steel













	A: Coverplate		B: Gap				C: Exposed Width		
Product	Width	Thick	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.
Dz100D	100	4	6	48	90	84	122	164	206
Dz120D	120	4	16	63	110	94	132	179	226
Dz165D	165	5	61	108	155	94	177	224	271
Dz45DW	45	3	0	19	38	38	60	79	98
Dz115DNB	115	4	21	69	116	95	125	173	220
Dz100DS	100	3	6	48	90	84	122	164	206

Dz DS Stainless Steel Model Available

Block Out: 43D x 9E x 15F x 12G

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.12